

ISUZU
DIESEL

3C SERIES


Dependable Power

3CE1 - 28.2 kW @ 3000 r/min)

3CE1 - 14.0 kW @1500 r/min

THE GO-TO-ENGINE


(that goes to work)

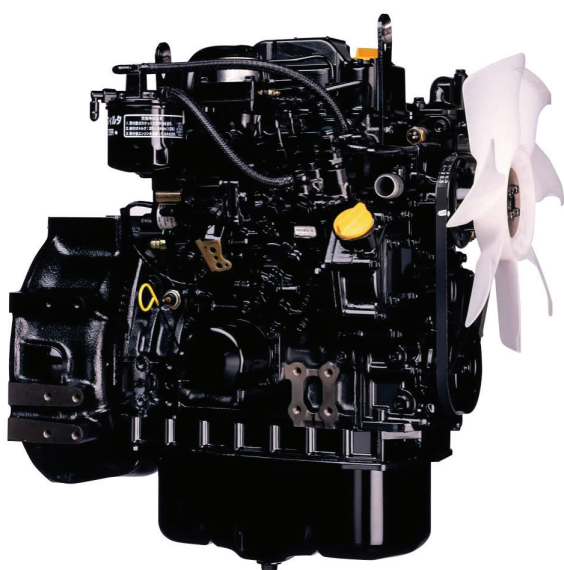

Lightweight, compact, environmentally friendly, economical industrial diesel engine which is highly rated around the world.

Standard

- Water cooled indirect diesel engine
- 12v Starter and Alternator
- Electric fuel pump for ease of priming
- Glow Plug starting Aid
- 500 hour oil drain & service intervals

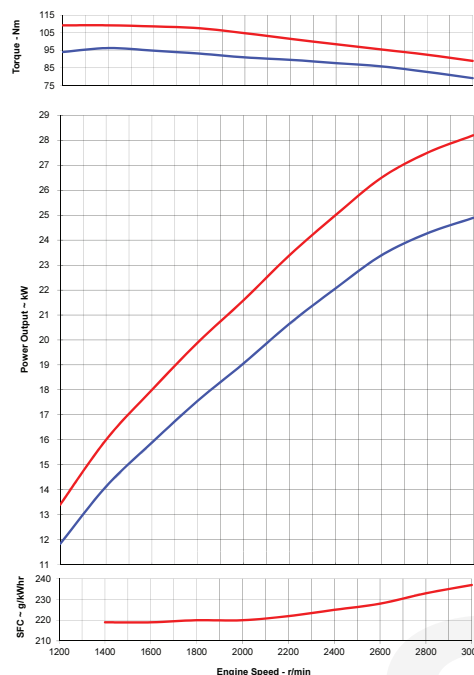


Available Options

- Side or bottom drain oil pan
- SAE A Gear Case PTO
- Flywheel housings: SAE5 or flat plate
- Cooling packages
- Air cleaners
- Engine Control Panel and Wiring Harness
- Engine mounting
- Weather and sound-proofing enclosure


Certifications

EU Stage **III A**

3C

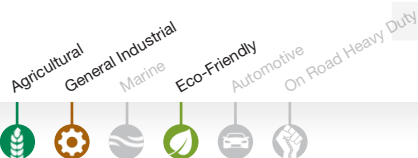

Applications

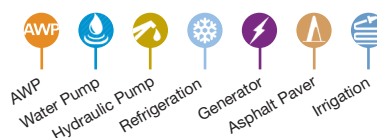

ISUZU
DIESEL

ISUZU
DIESEL

3C

SERIES

The Strength to Work Harder.

Model		3CE1
Emission Regulation	EU	Stage 3a
	USA	Interim Tier 4
Type		Vertical 4-Cycle Liquid Cooled Diesel
Number of Cylinders		3
Bore	mm	88
Stroke	mm	90
Displacement	L	1.642
Combustion System		Direct
Intake System		Naturally Aspirated
Maximum Speed	rpm	3000
Gross Rating	kW	28.2
	Bhp	37.8
Continuous Rating	kW	24.9
	Bhp	33.4
Generating Set Rating	kW	14
	Speed	1500r/min
Oil Pan Capacity		6.7 Litres
Starter Capacity		12v-1.7 kW
Alternator Capacity		12v-40 Amps
Dry Weight (engine only)		165 kg

