


Dependable Power | 4LE2X - 47.4 kW @ 2400 R/MIN (Variable Speed)


FOR MOVERS (not shakers)

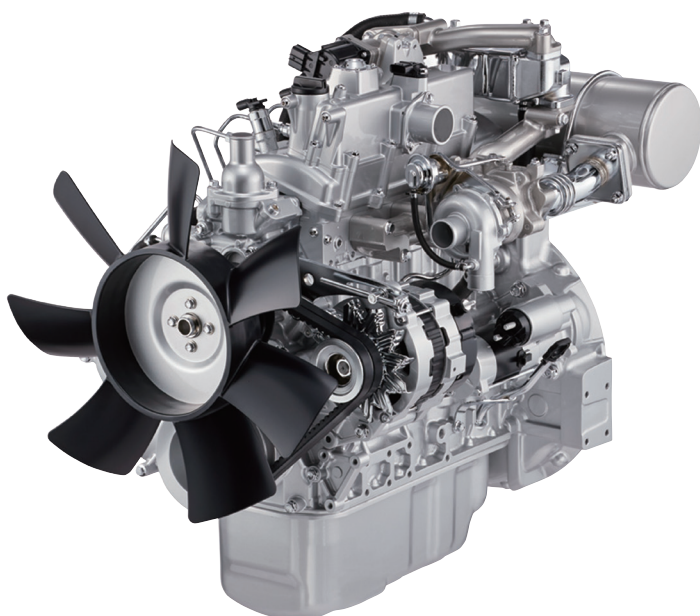

Lightweight, compact, environmentally friendly, economical industrial diesel engine which is highly rated around the world. The engines after treatment provides the ideal level of applied simplicity and end use satisfaction for those on the move..

Standard

- Emission Control device, maintenance free DOC for EPA Tier 4 final. For EU stage 5 engines are fitted with DPF
- Other emission-reducing features, including Cooled EGR, Wastegate Turbocharger
- High pressure Common Rail and Direct Injection
- Electric & self-priming fuel lift pump
- Glow plug starting aid
- 500-hour oil drain & service interval

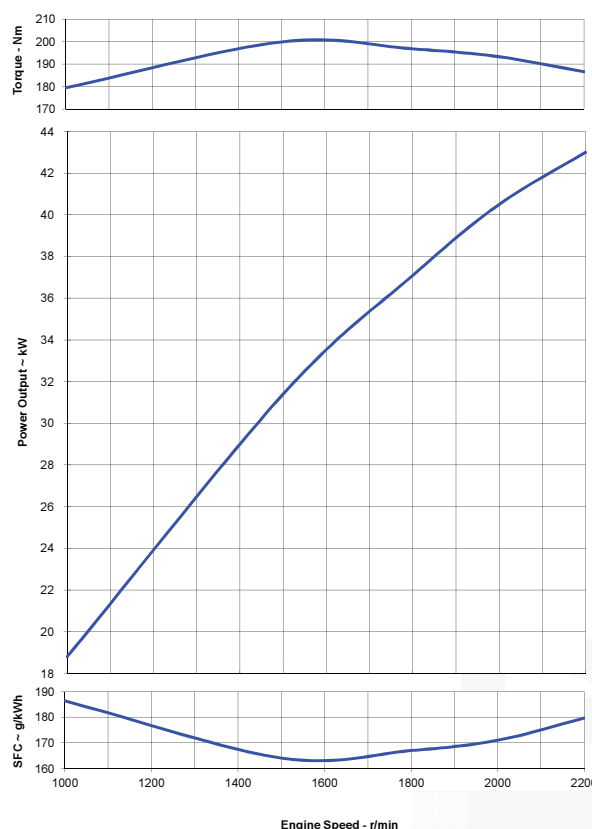

Available Options

- Side or bottom drain oil pan
- SAE A Gear Case PTO
- Flywheel housings: SAE #4, #5, or flat plate
- Cooling packages
- Air cleaners
- Engine control panel and wiring harness
- Engine mounting
- Weather and sound-proofing enclosure

Certifications

U.S. EPA Tier 4 **4**
EU Stage **V**

4LE2



ISUZU
DIESEL

4
SERIES

The Strength to Work Harder.

| | | |
|--------------------------|-----|--|
| Model | | 4LE2X |
| Emmission Regulation | EU | Stage 5 |
| | USA | Final Tier 4 |
| Type | | Vertical 4-Cycle Liquid Cooled Diesel |
| Number of Cylinders | | 4 |
| Bore | mm | 85 |
| Stroke | mm | 96 |
| Displacement | L | 2.179 |
| Combustion System | | Direct |
| Intake System | | Turbo Charged / Intercooled |
| Maximum Speed | rpm | 2400 |
| Gross Rating | kW | 47.4 |
| | Bhp | 63.5 |
| Continuous Rating | kW | 42.2 |
| | Bhp | 56.6 |
| Oil Pan Capacity | | 10.4 Litres |
| Starter Capacity | | 12v-2.0 kW |
| Alternator Capacity | | 12v-50 Amps |
| Dry Weight (engine only) | | 217 kg |

