



### Dependable Power 6HK1X - 210.0 kW @ 1900 r/min 6HK1X - 186.9 kW @1500 r/min

## BEAUTY FOR THE BEHOLDER (behold)




Lightweight, compact, environmentally friendly, economical industrial diesel engine which is highly rated around the world. The engines after treatment provides the ideal level of applied simplicity and end use satisfaction for those on the move.

#### Standard

- Emission Control device, maintenance free DOC & SCR for EPA Tier 4 final. For EU stage 5 engines are fitted with DPF and SCR combination
- Other emission-reducing features, including Cooled EGR, Wastegate Turbocharger
- High pressure Common Rail and Direct Injection
- Electric & self-priming fuel lift pump
- Glow plug starting aid
- 500-hour oil drain & service interval

#### Certifications

U.S. EPA Tier **4** EU Stage **V** 

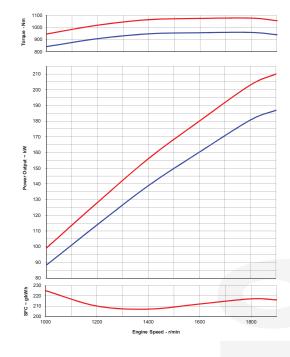

#### Available Options

- Side or bottom drain oil pan
- SAE B Gear Case PTO
- Flywheel housings: SAE #2
- Cooling packages
- Air cleaners
- Engine control panel and wiring harness
- Engine mounting
- Weather and sound-proofing enclosure





ISUZU

DIESEL

# The Strength to Work Harder.

| Model                    |       | 6HK1X                                    |
|--------------------------|-------|--|
| Emission Regulation      | EU    | Stage 5                                  |
|                          | USA   | Final Tier 4                             |
| Туре                     |       | Vertical 4-Cycle<br>Liquid Cooled Diesel |
| Number of Cylinders      |       | 6  |
| Bore                     | mm    | 115                                      |
| Stroke                   | mm    | 125                                      |
| Displacement             | L     | 7.79                                     |
| Combustion System        |       | Direct                                   |
| Intake System            |       | Turbo Charged<br>/Intercooled            |
| Maximum Speed            | rpm   | 1900                                     |
| Gross Rating             | kW    | 210                                      |
|                          | Bhp   | 281.5                                    |
| Continuous Rating        | kW    | 186.9                                    |
|                          | Bhp   | 250.5                                    |
| Generating Set Rating    | kW    | 172                                      |
|                          | Speed | 1500 r/min                               |
| Oil Pan Capacity         |       | 38 Litres                                |
| Starter Capacity         |       | 12v 3 kW                                 |
| Alternator Capacity      |       | 12v 110 Amps                             |
| Dry Weight (engine only) |       | 710 kg                                   |









Unit F, The Aquarius Centre Edison Close Waterwells Business Park Quedgeley, Gloucester GL2 2FN

 Phone
 +44 (0)1452 729707

 Fax
 +44 (0)1452 725194

 Email
 sales@enginesplus.co.uk

 Web
 www.enginesplus.co.uk