




Dependable Power | 4LE2T - 37.1 kW @ 2600 R/MIN (Variable Speed)


FOR MOVERS (not shakers)

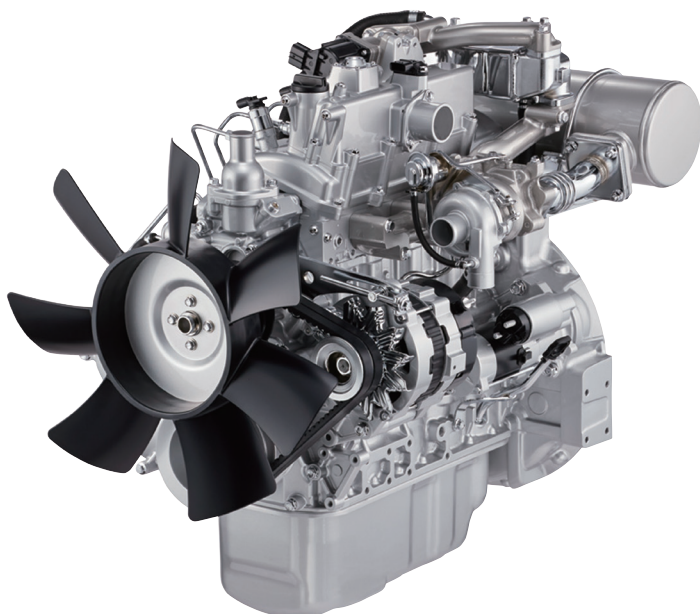

Lightweight, compact, environmentally friendly, economical industrial diesel engine which is highly rated around the world. The engines after treatment provides the ideal level of applied simplicity and end use satisfaction for those on the move..

Standard

- Emission Control device, maintenance free DOC for EPA Tier 4 final.
- Other emission-reducing features, including Cooled EGR, Wastegate Turbocharger
- High pressure Common Rail and Direct Injection
- Electric & self-priming fuel lift pump
- Glow plug starting aid
- 500-hour oil drain & service interval

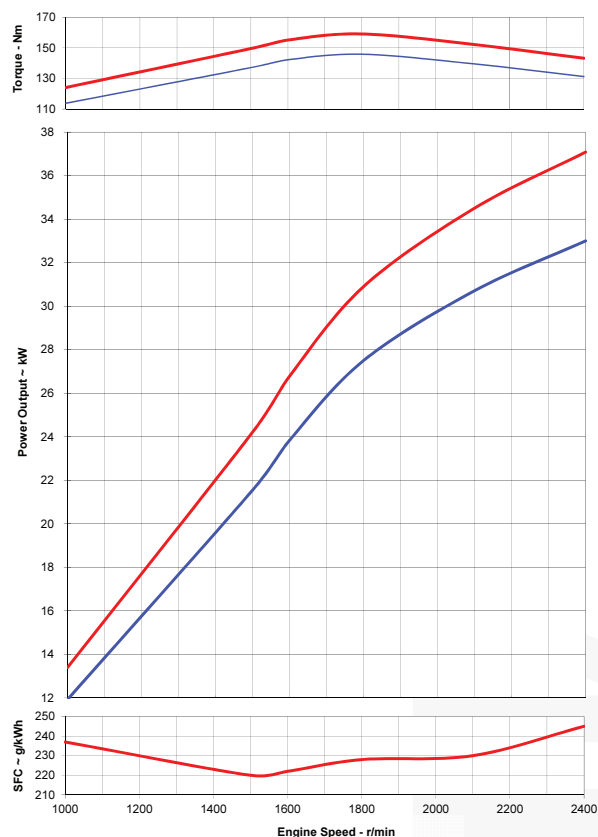

Available Options

- Side or bottom drain oil pan
- SAE A Gear Case PTO
- Flywheel housings: SAE #4, #5, or flat plate
- Cooling packages
- Air cleaners
- Engine control panel and wiring harness
- Engine mounting
- Weather and sound-proofing enclosure

Certifications

U.S. EPA Tier 4



ISUZU
DIESEL

ISUZU
DIESEL





4

SERIES

The Strength to Work Harder.

Model		4LE2T
Emmission Regulation	USA	Final Tier 4
Type		Vertical 4-Cycle Liquid Cooled Diesel
Number of Cylinders		4
Bore	mm	85
Stroke	mm	96
Displacement	L	2.179
Combustion System		Direct
Intake System		Turbo Charged
Maximum Speed	rpm	2600
Gross Rating	kW	37.1
	Bhp	49.7
Continuous Rating	kW	33.0
	Bhp	44.2
Oil Pan Capacity		10.4 Litres
Starter Capacity		12v-2.0 kW
Alternator Capacity		12v-50 Amps
Dry Weight (engine only)		216 kg

NB: EPA Tier 4 final engine max speed is 2400 r/min

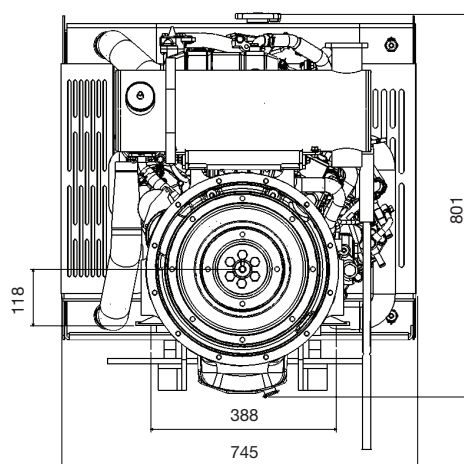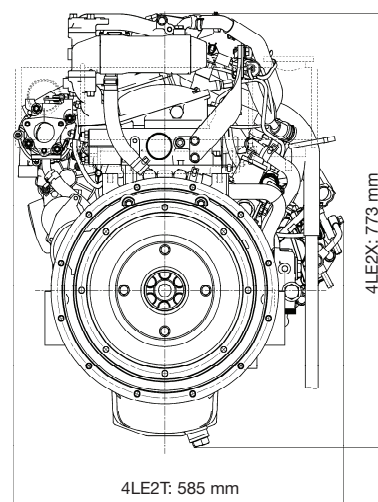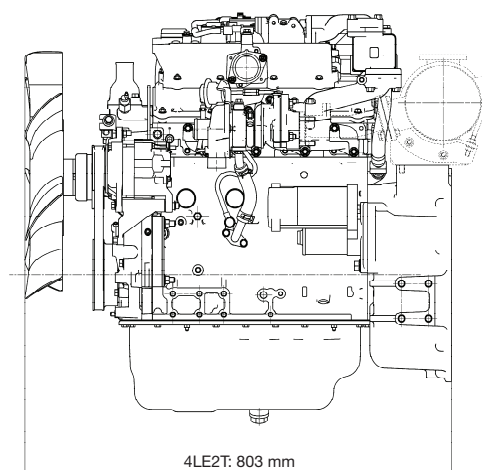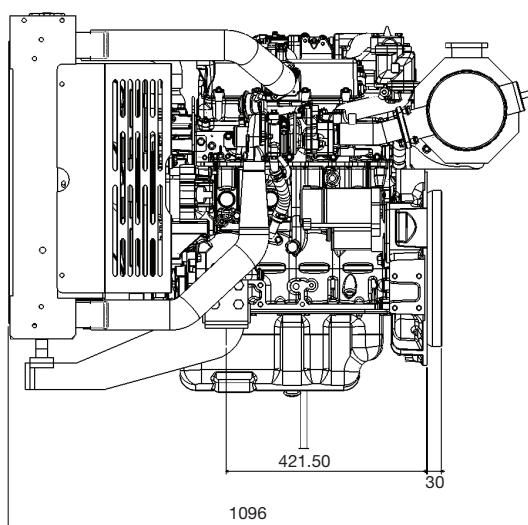

NB: Package drawn shown for reference only.